



Features:

- **UL 1449 Third Edition (Sept 2009) Listed**
- **50kA 8x20µs**
- **Type 1 SPD - 20kA I_n & 10kA (cUL Type 2 optional)**
 - 20kA I_n — Meets UL 96A Lightning Protection Master Label
 - Can be installed upstream or downstream of main disconnect
- **200kA SCCR (most models)**
- **All UL-required OCP & Safety Coordination Included Inside**
- **Voltage Specific Design: Performs better than 'one-size fits all'**
- **Tri-Mount Installation for more mounting flexibility:**
 - Same unit mounts on Pipe Nipple, Bracket or Din-Rail
- **Green = Go Visual Diagnostics: Easy to See; Easy to Understand**


Performance Specifications

- 50kA 8x20µs Per Mode
- UL 1449 tested Inominal: 20kA (highest available) + 10kA
- UL 1449 tested SCCR: 200kA (most models)
- Large-Block, 34mm square, 50kA MOVs
- Individually Fused & Thermally Protected MOVs
- UL 1449 Voltage Protection Ratings (VPRs):
 - 600V for 120V, 120/240, 208Y/120
 - 1000V for 277V, 480Y/277V
- Repetitive Impulse: 5000 - 3kA-8x20µs; 1000 - 10kA-8x20µs
- Data table located on backpage

Physical Specifications

- Relative Humidity Range: 0-95% non-condensing
- Operating Frequency: 47-63Hz
- Peak Operating Temperature: +85°C (185°F)
- Typical Operating Temperature: -40°C (-40°F) to +60°C (140°F)
- Response Time: < 1 nanosecond
- Solid State Bi-directional Operation
- NEMA 4X Polycarbonate Enclosure—UL746C(f1), UL 94-5VA
- Pre-wired with 3' (1m) of #10 AWG conductor
- Typical Type 2 Connection: #10 AWG to 30A breaker

Dimensions

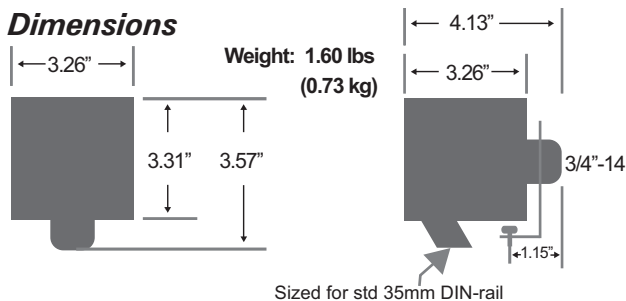


Green = Go Visual Diagnostic Monitoring

- Green LED = A-OK, Out = replace
- LED Visible from Multiple Sides & Angles - Better Viewing
- Every MOV is Monitored as opposed to 'power is present'

Tri-Mount Installation - L-bracket mounting kit is no cost accessory



Std. 3/4"-14 Nipple



DIN-rail Mount (rail not incl.)



Bracket Mount for flat surfaces

Options

- N-G protection
- Dry Contact & Audible Alarm
- Dry contact connection leads exit through nipple via #18 AWG
- Other configurations available for OEM - Call
- Lbracket mounting kit for DIN-rail is no cost accessory

Quality, Standards & Validation

- 2 year warranty (longer optional)
- UL 1449 Third Edition file: VZCA.E321351 at www.UL.com, cUL
- ANSI/IEEE C62.41.1-2002, C62.41.2-2002, and C62.45-2002
- NEMA LS-1
- IEC 61643, CE
- Burn-In tested Prior to Shipment
- ISO 9001:2008 Certified Quality Management System
- ISO 17025:2005 Certified Test Lab
- RoHS-compliant

Special Thank You to NASA/SATOP for design assistance & validation



SPDEE Model Numbers

S	50	A	Voltage	System	Options
	kA/Phase 50kA	Default	120V	1P	N
			127V	2P	D
			220V	3Y	2
			240V	3D	
			277V	3H	
			347V		
			480V		
			600V		

1P = One Pole, Single Phase
 2P = Two Pole, Split Phase
 3Y = Three Pole Wye
 3D = Three Pole Delta
 3H = Three Pole Hi-Leg Delta

N = N-G Protection
 D = Dry Contact & Audible Alarm
 2 = Type 2 SPD Bearing cUL Mark

No cost accessories:
 9876 L-bracket mounting kit
 8483 Supplementary label

Examples:
 S50A120V3Y = 50kA, 120V, 3 pole (208Y/120V)
 S50A277V3YN = 50kA, 277V, 3 pole (480Y/277V), with N-G

SPDEE Performance Data

MODEL	System Voltage & Config	UL 1449 THIRD Edition (Sept 2009)				I _n	SCCR	MCOV
		Voltage Protection Rating VPR 3000A						
		L-N	L-L	N-G*	L-G*			
S50A120V1P	120V	600	600*	1000*	20kA	200kA	150	
S50A120V2P	120V/240V	600	1000	600*	1000*	20kA	200kA	
S50A120V3Y	208Y/120V	600	1000	600*	1000*	20kA	200kA	
S50A127V1P	127V	700	600*	1200*	20kA	100kA	180	
S50A127V2P	127/254V	700	1200	600*	1200*	20kA	100kA	
S50A127V3Y	220Y/127V	700	1200	600*	1200*	20kA	100kA	
S50A220V1P	220V-1 pole	1200	1000*	1800*	20kA	200kA	320	
S50A220V3Y	380Y/220V	1200	2000	1000*	1800*	20kA	200kA	
S50A240V3H	120/240V - Hi-Leg Delta	600	1000	600*	1000*	20kA	200kA	
S50A240V1P	240V-1 pole	1200	1000	1800	20kA	200kA	320	
S50A240V3D	240V Delta - 3 pole	1500	1200	20kA	200kA	320		
S50A277V1P	277V	1200	1000*	1800*	20kA	200kA	320	
S50A277V2P	240/480V	1200	2000	1000*	1800*	20kA	200kA	
S50A277V3Y	480Y/277V	1200	2000	1000*	1800*	20kA	200kA	
S50A347V3Y	600Y/347Y	1500	2500	1200*	2500*	20kA	200kA	
S50A480V1P	480V-1 pole		1800	10kA	200kA	550		
S50A480V3D	480V Delta - 3 pole	3000	1800	10kA	200kA	550		
S50A480V3H	240/480V - Hi-Leg Delta	1200/1800	2500	10kA	200kA	320/550		
S50A600V3D	600V Delta - 3 pole	2500	2500	20kA	200kA	690		
S100A120V2P	120/240V	600	1000	600	20kA	100kA	150	
S100A277V2P	240/480V	1000	1800	1000	20kA	100kA	320	


* with optional N-G protection

Optional Form C Dry Contact & Audible Alarm

Form C Dry Contact:
 Three (3) #18 wires exit the pipe nipple
 Gray is Common, Blue is Normally Open, Red is Normally Closed

- Normally Open: Use Gray & Blue
- Normally Closed: Use Gray & Red


Audible Alarm:
 Alarm sounds when any protection is lost (If diagnostic LED extinguishes (i.e. problem), alarm will sound)

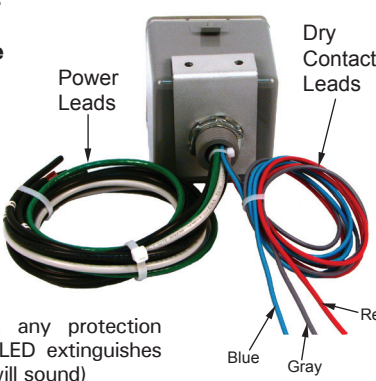

SPDEE Application Guide


	INSTALLED AT OR NEAR SERVICE ENTRANCE OR TRANSFORMER	INSTALLED > 10'(3M) FROM SERVICE ENTRANCE OR TRANSFORMER
SYSTEM CONFIGURATION	N-G Bonded - Does not require N-G protection	Downstream of N-G Bond - N-G protection suggested

1 Pole - Single

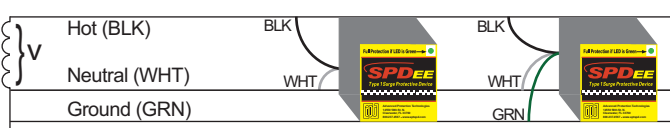


Voltage	Model Number	Model Number
V = 120V	S50A120V1P	S50A120V1PN
V = 127V	S50A127V1P	S50A127V1PN
V = 240V	S50A240V1P	S50A240V1PN
V = 277V	S50A277V1P	S50A277V1PN
V = 480V	S50A480V1P (L-G, not L-N)	N/A

2 Pole - Split Phase

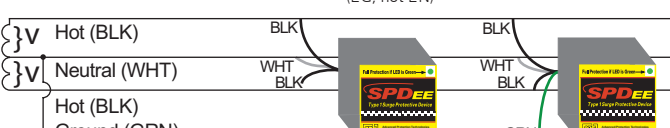


Voltage	Model Number	Model Number
V = 120V (120/240V)	S50A120V2P	S50A120V2PN
V = 127V (127/254V)	S50A127V2P	S50A127V2PN
V = 240V (277/480 or 240/480V)	S50A277V2P	S50A277V2PN

Wye

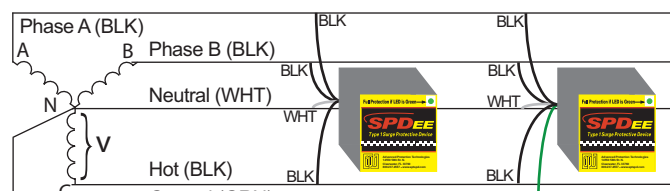


Voltage	Model Number	Model Number
V = 120V (208Y/120V)	S50A120V3Y	S50A120V3YN
V = 127V (220Y/127V)	S50A127V3Y	S50A127V3YN
V = 220V (380Y/220V)	S50A220V3Y	S50A220V3YN
V = 277V (480Y/277V)	S50A277V3Y	S50A277V3YN
V = 347V (600Y/347V)	S50A347V3Y	S50A347V3YN

Hi-Leg

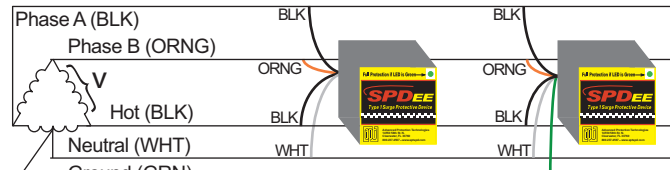

Voltage	Model Number	Model Number
V = 120/240V Hi-Leg Delta	S50A240V3H	S50A240V3HN
V = 240/480V Hi-Leg Delta	S50A480V3H	N/A

Delta

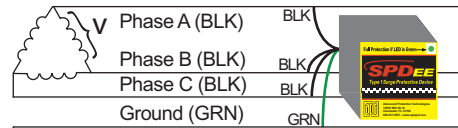

Voltage	Model Number
V = 240V	S50A240V3D
V = 480V	S50A480V3D
V = 600V	S50A600V3D

Corner Grounded Delta?
 Use same models & connect one SPD black & green to ground (diagnostics will function correctly)



Advanced Protection Technologies
 14550 58th Street North · Clearwater, Florida 33760
 (800) 237-4567 · (727) 535-6339 · Fax (727) 539-8955
 www.apttvss.com · info@apttvss.com

